

AP&T[®]

Shanghai Anping Static Technology Co.,Ltd

High Voltage Power Supply



AP-AC2455 series power supply

—AP&T—

Product description

AP-AC2455 series high voltage power supply is one of high voltage power supplies series for static eliminators produced by Anping Company (AP&T). It is used to control the static electricity on the surface of the target object so as to realize the static safety of the static electricity. It is a dedicated power supply for ion bar ,ionizing air blower,ionizing air gun ,ionizing air snake and so on.


Product features

- ① With over-voltage and short-circuit protection characteristics.
- ② High voltage and low current operation.
- ③ Easy to operate and install.
- ④ Safe and reliable.

Specification

Model	AP-AC2455-28	AP-AC2455-35	AP-AC2455-40	AP-AC2455-56
Input voltage	AC220V/50Hz or AC110V/60Hz			
Output voltage	AC2800V	AC3500V	AC4000V	AC5600V
Power	20W			
Working temperature	0°C—45°C			
Working humidity	<75%RH			
Dimensions: L*W*H	184*118*105mm			
Net weight	2600g			
Gross weight	3100g			


Product appearance introduction

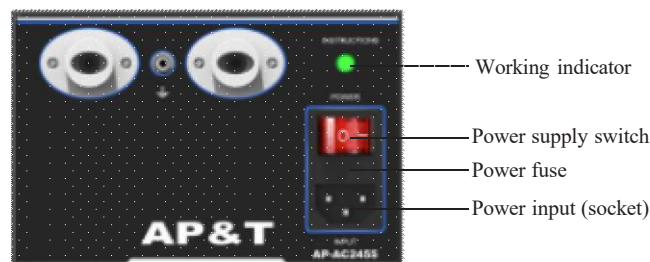

Installation

- ① Insert the national standard power cord plug into the mains socket.
- ② Insert the high-voltage connector of the static elimination device into the high-voltage output socket of the power supply and connect its grounding terminal to the grounding stud of the high-voltage power supply.
- ③ Turn on the power switch. The switch indicator lights up to show that the power supply is working.

Dimensions

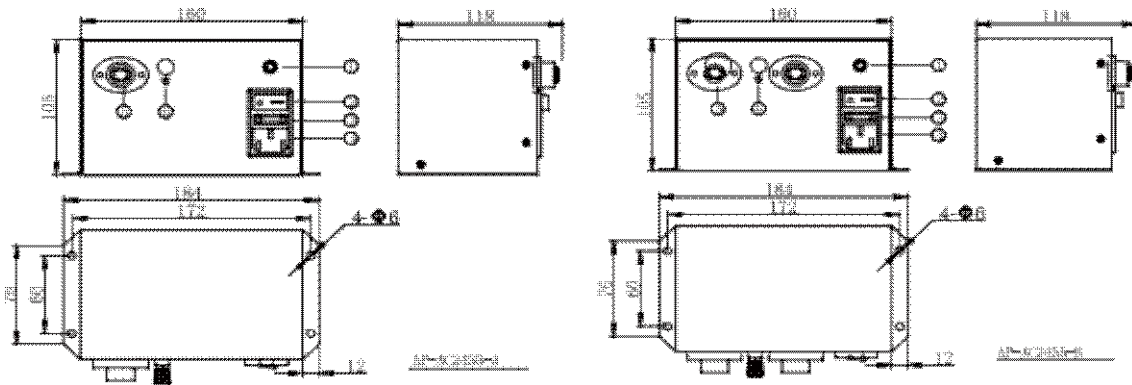

- ① Working indicator
- ② Power supply switch
- ③ Power fuse
- ④ Power input (socket)
- ⑤ High voltage output
- ⑥ Ground port

- ① Working indicator
- ② Power supply switch
- ③ Power fuse
- ④ Power input (socket)
- ⑤ High voltage output
- ⑥ Ground port

Maintenance

Stop using when the red switch indicator light on the high-voltage power supply panel is off or not on. Re-use can be done only after checked and repaired by professional maintenance personnel and the electrical performance index is normal

Safety warning

Please read the instruction manual carefully before installing and using this equipment.

The working input power of the power box must be reliably connected to the grounding wire of the electrical power supply circuit and the grounding resistance is less than 4 ohms; otherwise, it is easy to cause abnormal or even damage to the ion bar and high-voltage power supply. It is not suitable to use this equipment in an environment with a humidity > 70%.

It is strictly forbidden to use this equipment in flammable and explosive environments.

It is strictly forbidden to disassemble the product without authorization. Internal maintenance and repair must be performed by professionals.

It is strictly forbidden to touch the product with water stains, otherwise an abnormality may occur and cause electric shock or fire.

Turn off the power when checking or replacing the product, otherwise it may cause electric shock or fire.

The product is specially designed to eliminate static electricity and is strictly prohibited for other purposes. Any abnormal use may cause machine failure, electric shock, fire and other hidden dangers.

Please check the input voltage before powering on the product. Any power supply that does not meet the specifications will cause damage or even malfunction to the product.

Please check the power cord of the product regularly and replace it immediately if it is damaged, otherwise it will easily cause problems such as electric leakage and abnormal operation.

After-sales service

- ① The high-voltage power supply has undergone rigorous testing and aging treatment before leaving the factory and its performance fully meets the relevant indicators marked in the instructions for use.
- ② Manufacturer will repair or replace any defective parts that have been inspected by for free within one year from the date of purchase. However, this commitment does not apply to the following situations:
 - The equipment is misused and installed;
 - Damage caused by negligence and accident during use;
 - It has been altered, disassembled or repaired by other service departments not authorized by Anping Company.
- ③ AP&T does not assume any obligations and related responsibilities of product users except for the repair or replacement of parts within this regulation.

■ Packaging accessories

- ① Warranty card
- ② Manual
- ③ Certificate of conformity
- ④ National standard power cord